


P.C.B Layout (copper-sided view)

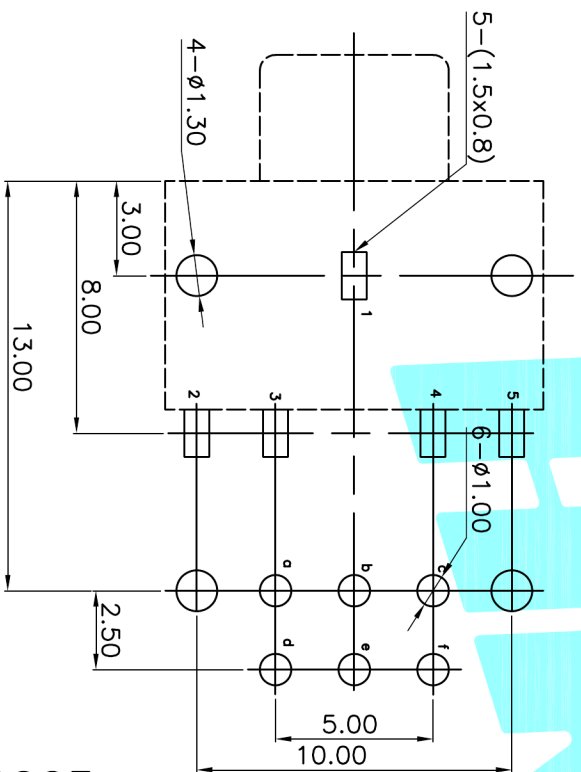

Rating:0.5A 30V DC
 Contact Resistance:100 mΩ Max.
 Operating temperature:-20℃~70℃
 Operating force:3-20N
 Operating Life:5,000cycles

L=2.5	PJ-3137A-A	PJ-3137A-B
L=4	PJ-3137B-A	PJ-3137B-B
L=2.5	PJ-3137A-C	PJ-3137A-D
L=4	PJ-3137B-C	PJ-3137B-D
Schematic		

② Terminal	11	Phosphor bronze	Au Plating			
① Housing	1	Nylon	Black			
ITEM	PART NAME	TER.NO.	QTY.	MATERIAL	FINISHING	REMARK
APPROVALS		DATE		ELECTRONICS CO.,LTD		
DRAWN		J.X.Zhong		2013/11/11		
CHECKED				TITLE: PHONE JACKES		
APPROVALS				PART NO. PJ-3137A		
TOLERANCES ARE		30~0.1	±0.30	ANGLE		
		10~0.30	±0.20	UNIT: mm	SCALE: 1:1	PROJ.
		5~10	±0.15	DRAWING NO.	SHEET 1 OF 1	
		~ 5	±0.10			
ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			