


P.C.B LAYOUT(copper--sided view)

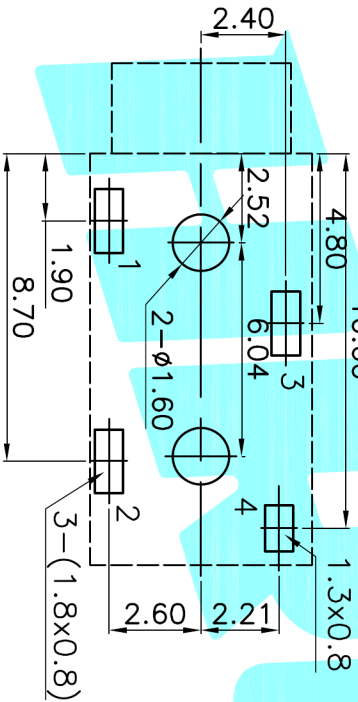

H=0.9	PJ-3270-A	PJ-3270-B	PJ-3270-C
H=1.6	PJ-3270-D	PJ-3270-E	PJ-3270-F
H=2.1	PJ-3270-G	PJ-3270-H	PJ-3270-I
H=2.8	PJ-3270-J	PJ-3270-K	PJ-3270-L
Schematic			

Rating:0.5A 30V DC
 Contact Resistance:100 m Ω Max.
 Operating temperature:-20 $^{\circ}$ C~70 $^{\circ}$ C
 Operating force:3-20N
 Operating Life:5,000cycles

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			
<p>DRAWN J.X.Zhang 2013/11/11</p> <p>CHECKED</p> <p>APPROVALS</p> <p>TOLERANCES ARE 30μm\pm 10μm\pm 5μm\pm 5μm</p> <p>APPROVALS</p> <p>DATE</p> <p>ITEM ① Terminal Housing 4 1 Nylon Black</p> <p>PART NAME TER.NO. QTY. MATERIAL FINISHING REMARK</p> <p>APPROVALS DATE</p> <p>TITLE: PHONE JACKES</p> <p>PART NO. PJ-3270</p> <p>SCALE: 1:1</p> <p>UNIT: mm</p> <p>ANGLE: $\pm 2^{\circ}$</p> <p>PHOSPHOR BRONZE Au PLATING</p> <p>NYLON BLACK</p> <p>PROJ. SHEET 1 OF 1</p>						

HYPER
 ELECTRONICS CO.,LTD