


P.C.B LAYOUT(copper-sided view)
3-(0.6x2.5)

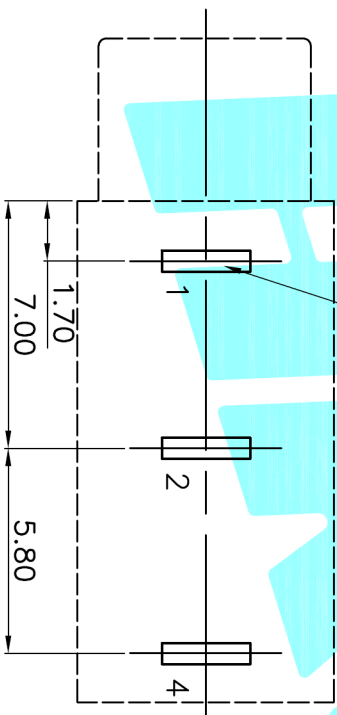

Model No.	A=φ6 A=M6xP0.5	PJ-3230-A PJ-3230A-A
Schematic		

Rating:0.5A 30V DC
 Contact Resistance:100 mΩ Max.
 Operating temperature:-20℃~70℃
 Operating force:3-20N
 Operating Life:5,000cycles

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			

② Terminal	4	Phosphor bronze	Au Plating
① Housing	1	Nylon	Black
ITEM	PART NAME	TER'NO.	QTY.
APPROVALS		DATE	
DRAWN	J.X.Zhang	2013/11/11	
CHECKED			
APPROVALS			
TOLERANCES ARE	30~0.15 10~0.30 5~0.10 ~5	±0.30 ±0.20 ±0.15 ±0.10	ANGLE ±2°
		UNIT: mm	SCALE: 1:1
		DRAWING NO.	PROJ. SHEET 1 OF 1

HRON
 ELECTRONICS CO.,LTD

TITLE: PHONE JACKES
 PART NO. PJ-3230