

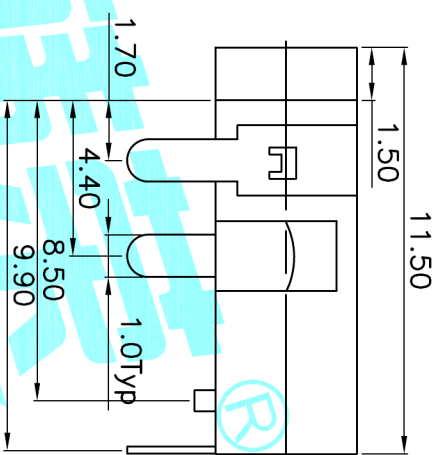


P.C.B LAYOUT(copper-sided view)

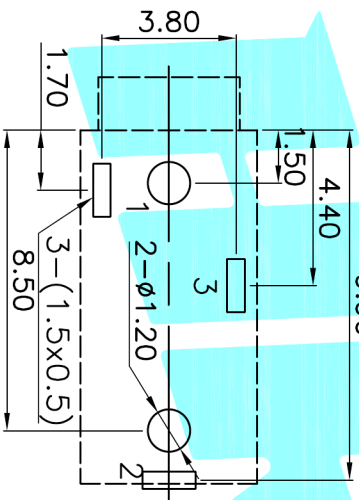

Rating:0.5A 30V DC
 Contact Resistance:100 m Ω Max.
 Operating temperature:-20 $^{\circ}$ C~70 $^{\circ}$ C
 Operating force:3-20N
 Operating Life:5,000cycles

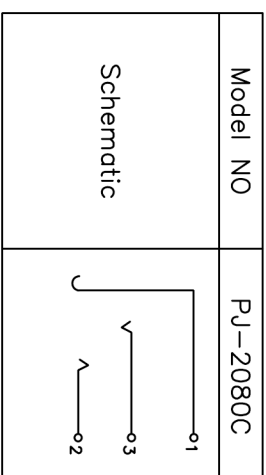

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			

② Terminal	3	Phosphor bronze	Au Plating			
① Housing	1	Nylon	Black			
ITEM	PART NAME	TER.NO.	QTY.	MATERIAL	FINISHING	REMARK
APPROVALS		DATE				
DRAWN	J.X.Zhang	2013/11/11		TITLE: PHONE JACKES		
CHECKED				PART NO. PJ-2080C		
APPROVALS				DRAWING NO.		
TOLERANCES ARE				30 \pm BLT	± 0.30	ANGLE
				10 \sim 30	± 0.20	UNIT: mm
				5 \sim 10	± 0.15	SCALE: 1:1
				\sim 5	± 0.10	PROJ.
					$\pm 2^{\circ}$	SHEET 1 OF 1

HYROTECH
 ELECTRONICS CO.,LTD