
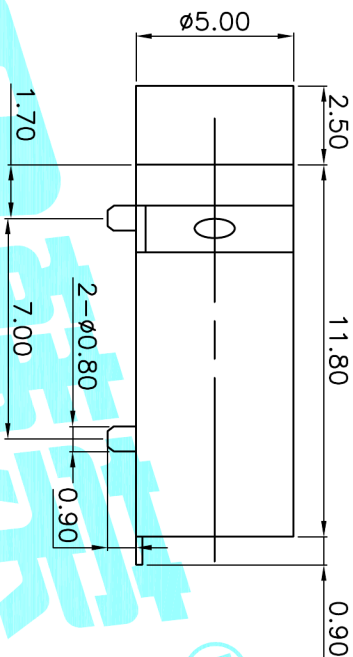


P.C.B Layout (copper-sided view)

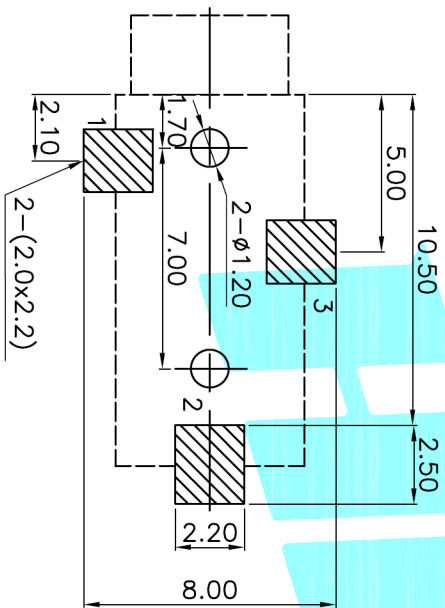

Rating:0.5A 30V DC
 Contact Resistance:100 mΩ Max.
 Operating temperature:-20℃~70℃
 Operating force:3-20N
 Operating Life:5,000cycles

Model NO	PJ-326
Schematic	

② Terminal	—	3	Phosphor bronze	Au Plating	—	
① Housing	—	1	Nylon	Black	—	
ITEM	PART NAME	TER.NO.	QTY.	MATERIAL	FINISHING	REMARK
APPROVALS		DATE				
DRAWN	J.X.Zheng	2013/11/11	ELECTRONICS CO.,LTD			
CHECKED			PHONE JACKES			
APPROVALS			PART NO.	PJ-326		
TOLERANCES ARE		30~0.11	±0.30	ANGLE		
	10~0.30	±0.20		UNIT: mm	SCALE: 1:1	
	5~10	±0.15	±2'	DRAWING NO.	PROJ-	
	~5	±0.10		SHEET	1 OF 1	
ECN NO.	REV.	DATE.	DESCRIPTION	CHANGE.	CHECK.	APPRO.
	A		NEW			