
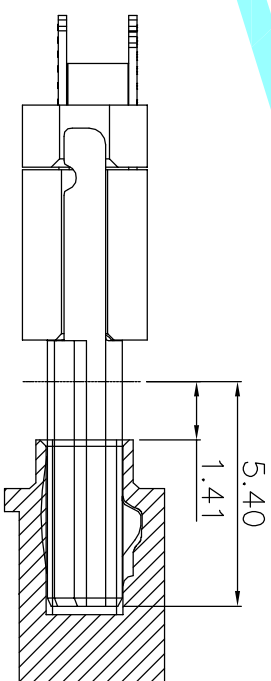


- Specifications
1. Rating : AC 30V 1.0A
 2. Dielectric withstanding: 100V(AC) for 1min
 3. Contact Resistance : 50mΩmax
 4. Insulation Resistance: 100MΩ Min
 5. Operating Temperature Range: -25°C+80°C
 6. Operating Force : 8-30N
 7. Operating Life : 5,000Cycles

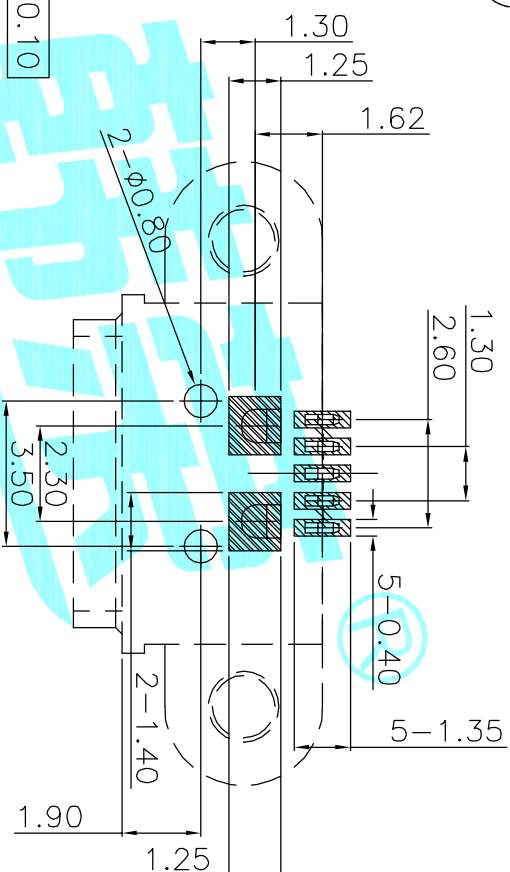

A-A

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			

③ Shell	—	1	SUS	Natural	
② Contact	—	5	Copper Alloy	Au Plated	
① Housing	—	1	LCP	Black	
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING
APPROVALS		DATE			
DRAWN JKUN.LU		2014/9/29	ELECTRONICS CO.,LTD		
CHECKED			防水USB CONNECTOR		
APPROVALS			PART NO.		U-E-MSS-Y-2
TOLERANCES ARE		30~以上 ±0.30	ANGLE	UNIT: mm	SCALE: 1:1
		10~30 ±0.25			PROJ:
		5~10 ±0.20			DRAWING NO.
		~5 ±0.15			SHEET 1 OF 1