
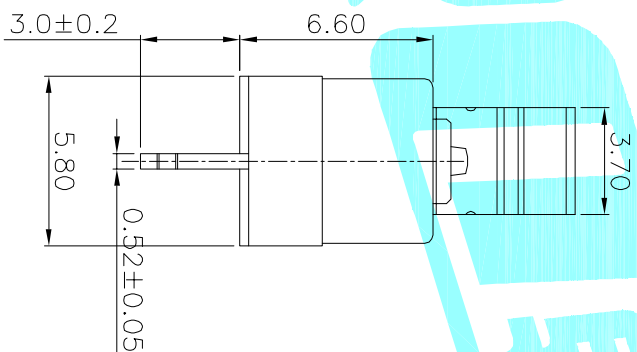


Circuit Diagram

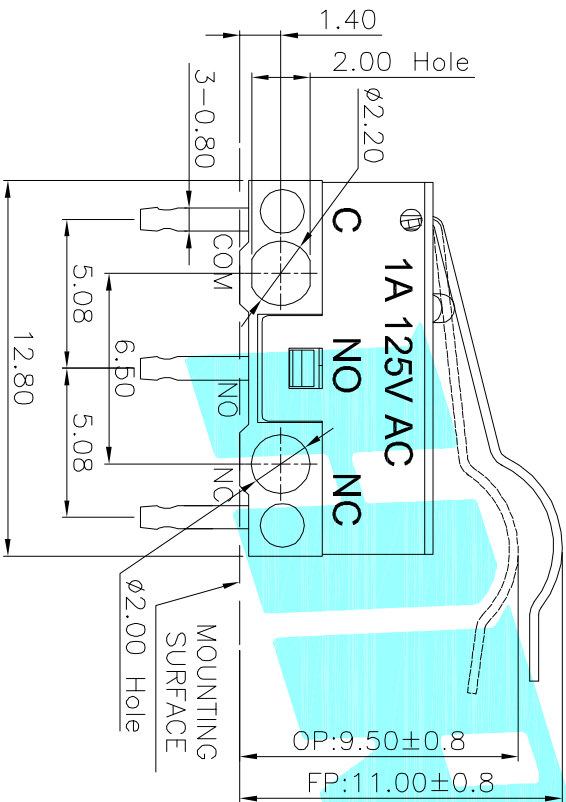








- NOTE:
1. Rating: DC30V 0.1A
 2. OP: 9.50±0.8
 3. Operating force: 30±15gf
 4. Mechanical Life: 3,000,000

ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
⑦	Lever	—	1	Stainless Steel	—	—
⑥	Shrapnel	—	1	Beryllium Copper	—	—
⑤	Contact	—	1	Ag	—	—
④	Terminal	—	3	Brass(0.52t)	Plating silver	—
③	Housing	—	1	PBT	White	—
②	Knob	—	1	PBT	White	—
①	Cover	—	1	PBT	Black	—

APPROVALS		DATE	ELECTRONICS CO.,LTD	
DRAWN	J.X.Zhang	2013/11/6	MICRO SWITCHS	

APPROVALS		PART NO.	SCALE:
CHECKED	—	K9-1267G-G166	1:1

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.	TOLERANCES ARE	ANGLE	UNIT:	SCALE:	PROD.	SHEET
—	A	—	NEW	—	—	—	30~0.1t 10~0.30 5~0.10	±2°	mm	1:1	PROD.	1 OF 1

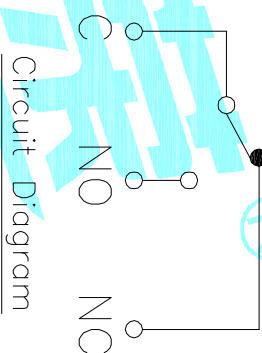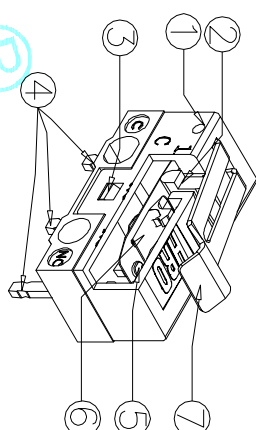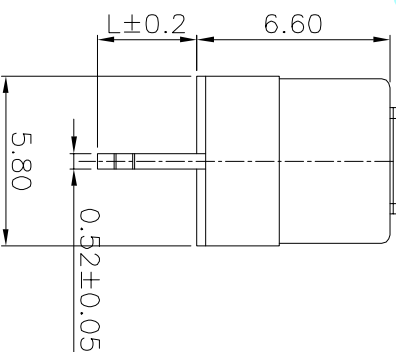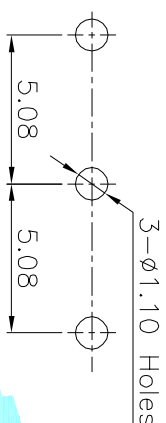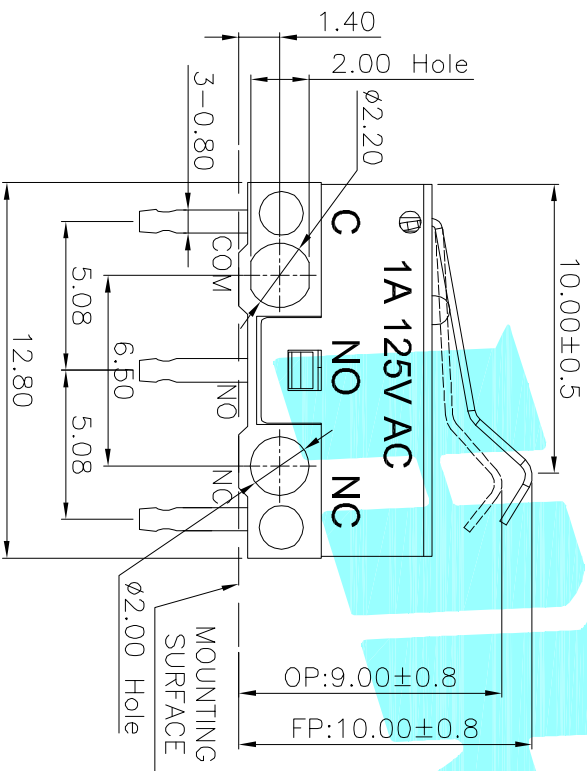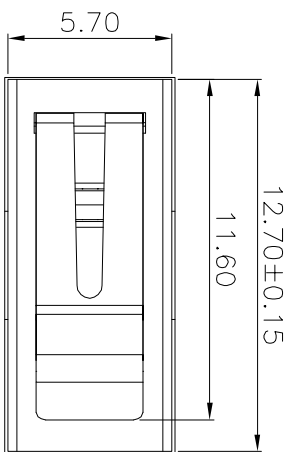

- NOTE:
- 1.Rating:DC30V 0.1A
 - 2.OP:9.00±0.8
 - 3.Operating force:30±15gf
 - 4.Mechanical Life:3,000,000

⑦	Lever	1	Stainless Steel			
⑥	Shrapnel	1	Beryllium Copper			
⑤	Contact	1	Ag			
④	Terminal	3	Bross(0.52t)	Plating silver		
③	Housing	1	PBT	White		
②	Knob	1	POM	White		
①	Cover	1	PBT	Black		
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK

APPROVALS		DATE	
DRAWN	J.X.Zhang	2013/11/6	

CHECKED		TITLE:	MICRO SWITCHS
APPROVALS		PART NO.	K9-1267G-G116

TOLERANCES ARE		30~80±	±0.30	ANGLE		
10~30	±0.20	5~10	±0.15	±2°		
~5	±0.10					
ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			



ELECTRONICS CO.,LTD

PROD. SHEET 1 OF 1