ROHS

http://www.smtswitch.com

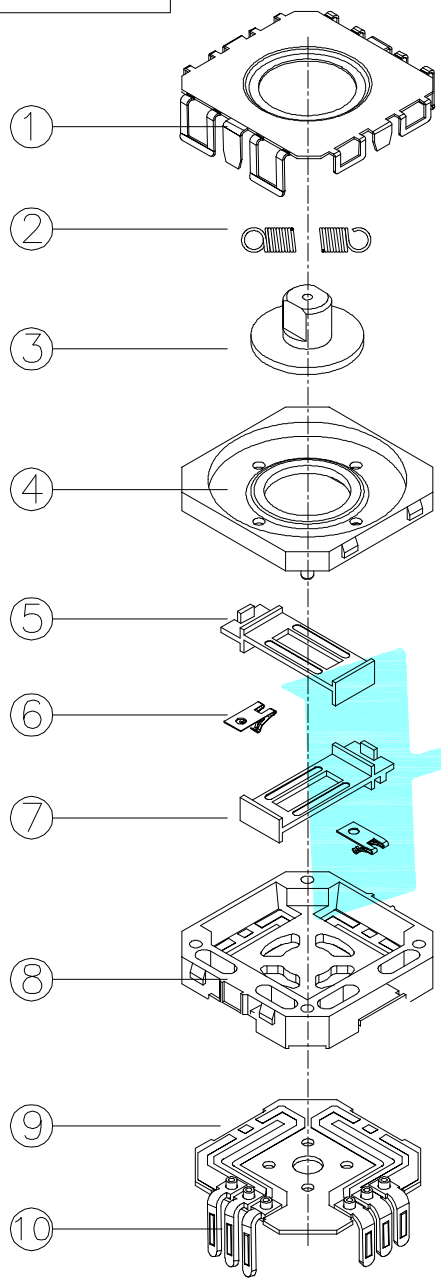

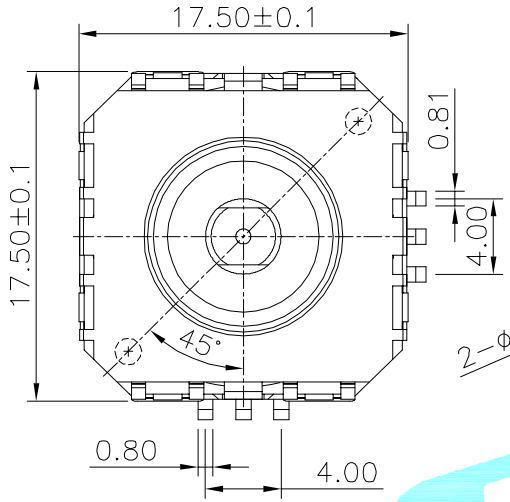

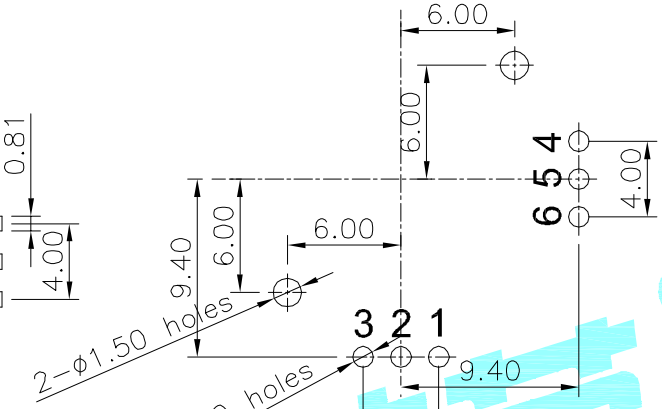

PCB Layout(Pattern Side)

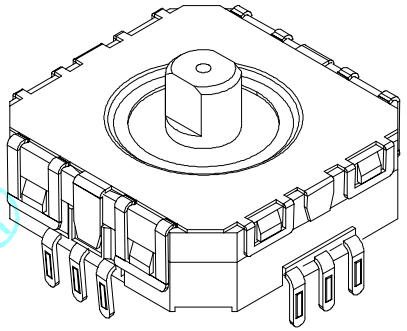

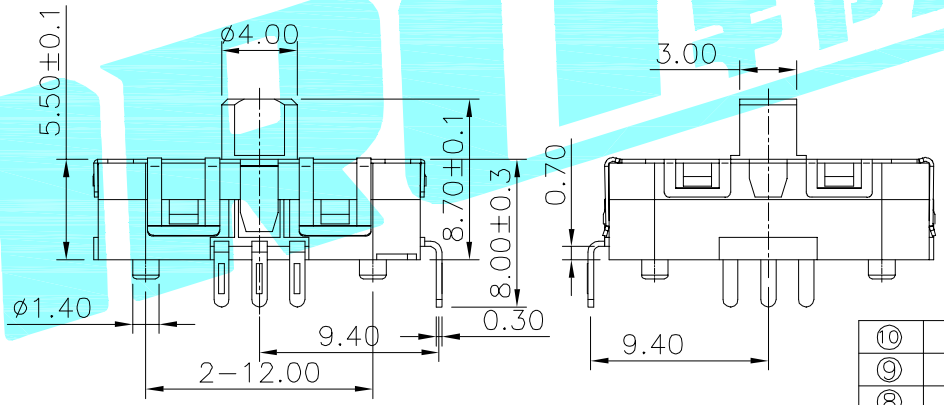

NOTE:
Operating Force: 50gf-180gf Max

Terminal / Direction	①	②	③	④	⑤	⑥
↑	●	●				
↓		●	●			
←					●	●
→				●	●	

Circuit Diagram

ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
⑩	Terminal	——	6	H65(0.3t)	Plating silver	——
⑨	PCB	——	1	FR4	——	——
⑧	Base	——	1	PPA	Black	——
⑦	Movable pin 2	——	1	LCP	White	——
⑥	Contact	——	2	Brass(0.10t)	Plating silver	——
⑤	Movable pin 1	——	1	LCP	White	——
④	Cover 2	——	1	FR52	Black	——
③	Rocker	——	1	FR52	Black	——
②	spring	——	1	SUS	——	——
①	Cover 1	——	1	SUS	White	——

APPROVALS		DATE	HRO 精荣® ELECTRONICS CO.,LTD	
DRAWN	JKUN.LU	2015/6/30		
CHECKED			TITLE:	MULTIFUNCTIONAL SWITCHS
APPROVALS			PART NO.	K1-1539DA-01
TOLERANCES ARE: 30~以下 ±0.30; 10~30 ±0.20; 5~10 ±0.15; ~5 ±0.10; ANGLE ±2°			UNIT: mm	SCALE: 1:1 PROJ:
			DRAWING NO.	—— SHEET 1 OF 1

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
——	A	——	NEW	——	——	——