
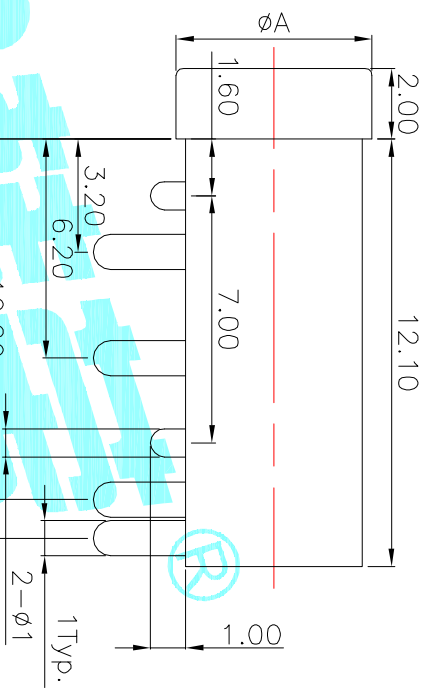


P.C.B LAYOUT(copper-sided view)

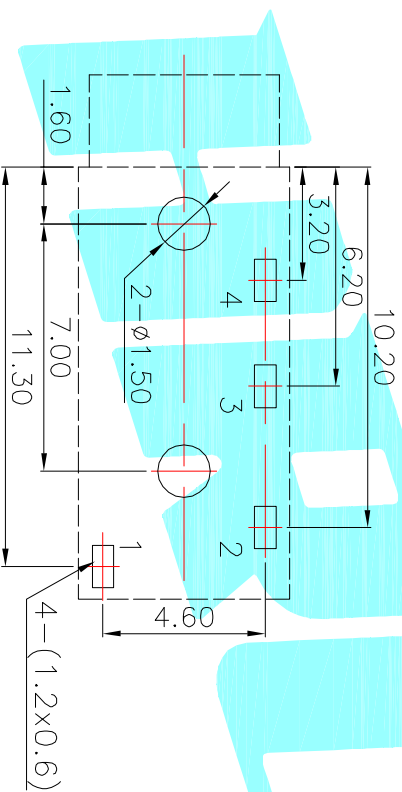

L=2.8 A=φ5.6	1	2
L=2.8 A=φ5.0	3	4
L=1.8 A=φ5.6	5	6
Schematic		

Rating:0.5A 30V DC  
 Contact Resistance:100 mΩ Max.  
 Operating temperature:-20℃~70℃  
 Operating force:3~20N  
 Operating Life:5,000cycles

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			
<p>△20180423端子长度变更</p>						
DRAWN J.X.Zhong 2013/11/11						
CHECKED						
APPROVALS						
TOLERANCES ARE						
30~12.5	±0.30	ANGLE	PART NO.	TITLE:	PHONE JACKES	PROJ: PJ-3200B
10~30	±0.20	ANGLE	UNIT: mm	SCALE: 1:1		PROJ:
5~10	±0.15	±2'	DRAWING NO.			SHEET 1 OF 1
~5	±0.10					
<p><b>HRON</b>                  ELECTRONICS CO.,LTD</p>						
<p>② Terminal 4 Phosphor bronze Au Plating</p>						
<p>① Housing 1 Nylon Black</p>						
<p>ITEM PART NAME TERNO. QTY. MATERIAL FINISHING REMARK</p>						
<p>APPROVALS DATE</p>						